

Product Specification

43GHz Balanced Photodetector

BPDV21x0R

PRODUCT FEATURES

- 43GHz typical bandwidth with flat response
- Excellent pulse behavior
- Unsurpassed high-power handling capability
- Unique on-chip integrated bias network



APPLICATIONS

- 43Gb/s coherent communication systems
- Advanced Test & Measurement systems
- High speed optical sensing

The BPDV2120R consists of two optimized 43GHz, waveguide-integrated photodiodes on a single chip, which show an extremely flat frequency response, both in power and in phase. II-VI's on-chip integrated bias network with an optimized RF-design ensures an undisturbed frequency response from DC to the 3dB cut-off frequency and saves costs for an external bias-tee. The hermetic module is especially designed for use in the optical window at 1550nm and optimal RF-performance. The pulse response reveals virtually no ringing. It is best suited for Test & Measurement or Microwave photonics applications up to 35GHz. A further advantage of the waveguide structure is the unbeatable high power behavior. The photodetector shows a linear response up to an optical input power of 10dBm.

Tailored configurations are available, such as BPDV dual pair -and quad sets, including connector customization and fiber matching to enable coherent detection.

PRODUCT SELECTION


BPDV21x0Rv-Vy-zz

- | | | |
|-----|----|--|
| x: | 2 | = standard PDL |
| | 5 | = low PDL |
| Rv: | R | = single balanced detector |
| | RM | = dual pair of balanced detectors (only BPDV2150R) |
| | RQ | = quad set of balanced detectors (only BPDV2150R) |
| Vy: | VF | = female V [®] connector (standard) |
| | VM | = male V [®] connector |
| zz: | FP | = FC/PC connector (standard), |
| | | Customized configurations upon request |

I. Pin Descriptions

# Pin	Symbol	Description
3	V_{PD2}	PD2 bias supply
2/15	GND	ground= case ground
14	V_{PD1}	PD1 bias supply

II. Block Diagram

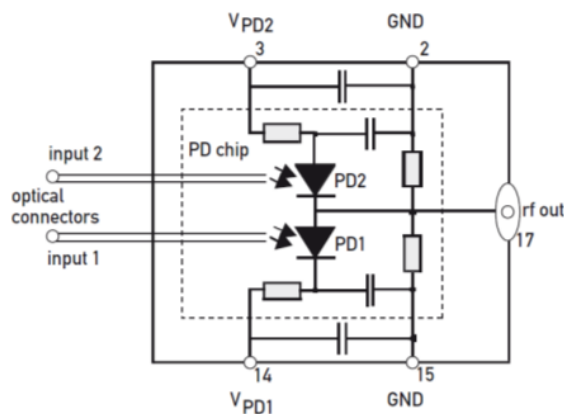

III. Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Photodiode Bias Voltage	V_{PD1}	—	0		4.0	V
	V_{PD2}		-4.0		0	
Maximum Average Optical Input Power	P_{opt}	40Gb/s NRZ, per channel			16	dBm
Maximum Average Optical Input Power	P_{opt}	Pulse <25ps or RZ at 40Gb/s, per channel			19	dBm
Electro Static Discharge (ESD)	V_{ESD}	C= 100pF, R= 1.5kΩ HBM	-250		+250	V
Fiber Bend Radius			16			mm

IV. Environmental Specifications

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Case Temperature	T_{Case}		0		75	°C
Relative Humidity	RH	non condensing	5		85	%
Storage Temperature	T_{sto}		-40		85	°C



V. Operating Conditions

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Average Optical Input Power Range	P_{OPT}	for each diode			10	dBm
Wavelength Range	λ		1525	1550	1575	nm
Photodiode Bias Voltage	V_{PD1}		+2.0	+2.8	+3.3	V
	V_{PD2}		-3.3	-2.8	-2.0	V

VI. Electro-Optical Specifications¹


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Photodiode DC Responsivity	R	optimum polarization	0.45			A/W
Imbalance of Responsivity	Imb	$Imb = 10 * \log_{10}(R_{PD1}/R_{PD2}) $		0.15	0.5	dB
Polarization Dependent Loss	PDL	BPDV2120		0.4	0.8	dB
		BPDV2150		0.2	0.4	dB
Photodiode Dark Current	I_{dark}			5	200	nA
Optical Return Loss	ORL		27			dB
3dB Cut-off Frequency	f_{3dB}		37	42		GHz
RF Common Mode Rejection Ratio	CMRR	$CMRR = 20 * \log_{10} (S21 - S31)/(S21 + S31) $		18		dB
Output Reflection Coefficient	S22	0...50 GHz		-5	-3	dB
Skew					2	ps
Skew (Inter Detector Module)		RM & RQ version			10	ps
Notes:						
1. $\lambda = 1550\text{nm}$, $V_{PD} = \pm 2.8\text{ V}$, $T = 25^{\circ}\text{C}$, $P_{OPT} = -3\text{dBm}$						

VII. Typical Performance

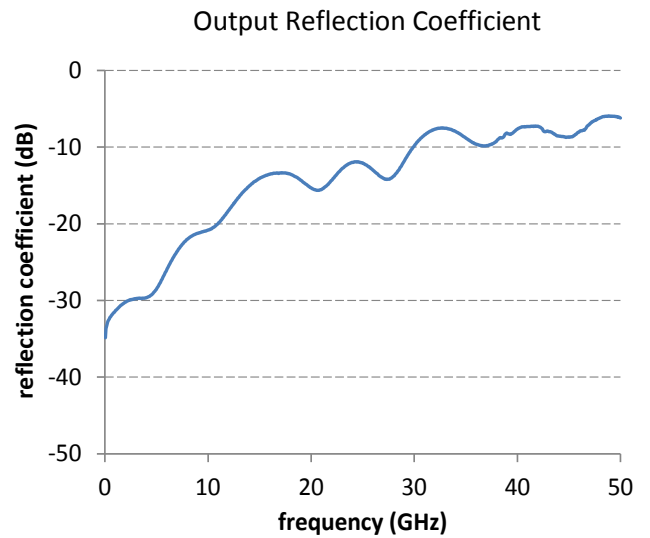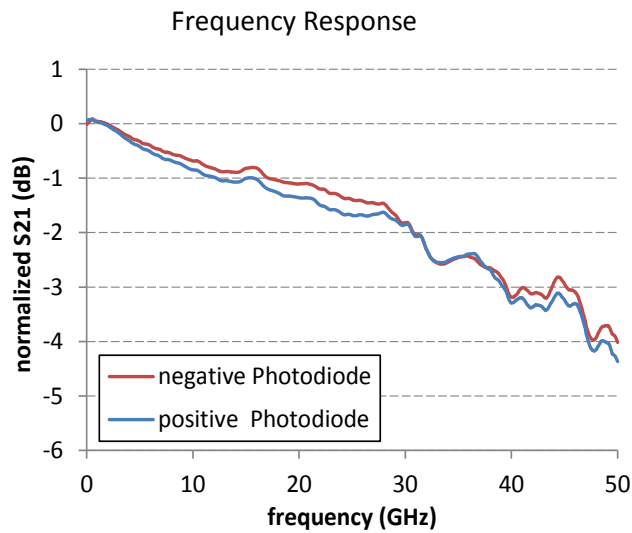

VIII. Mechanical Specifications

All Dimensions in mm

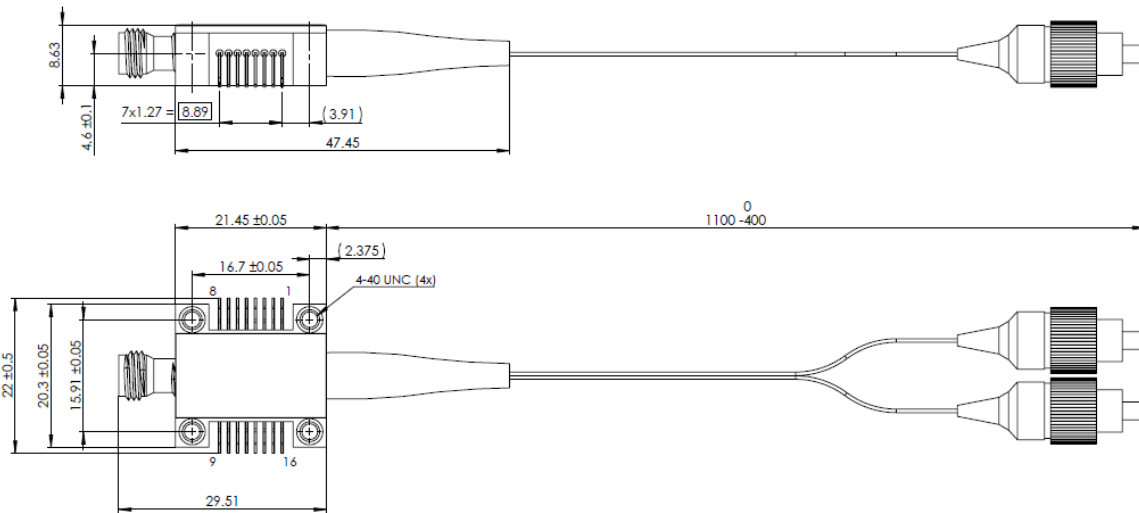

Parameter	Description
Signal fiber PD1	SMF-28, 900µm loose buffer, yellow, label "1"
Signal fiber PD2	SMF-28, 900µm loose buffer, yellow, label "2"

IX. Accessories

A. Evaluation Kit

The kit serves as easy-to-use utility to characterize the balanced photodetector under laboratory conditions and contents of a printed circuit board (PCB), four screws to establish removable connectivity between photodetector and board, as one DC cable to ensure the photodiode bias voltage.

ORDERING INFORMATION

EVA-BPDV

Evaluation board for all balanced detectors; includes 1x PCB, 1x DC cable set and 4x socket head screws 4-40 UNC

B. Photodetector Power Supply

We recommend usage of our individually accessible photodetector power supply (PPS), in particular for optimized performance at high optical input levels. As portable device it provides stable biasing voltage supply and a front display for review on photocurrent.



ORDERING INFORMATION

PPS-03-B

Photodetector power supply for all balanced detectors; includes 2x PPS, 1x cable-set B-type. The PPS is compatible with EVA-board (specified scheme applicable to RM & RQ version). PPS units include 2x 1.5V batteries

Notes

- Any trademarks used in this document are properties of their respective owners.
- II-VI Incorporated reserves the right to make changes without notice.

X. Revision History

Revision	Date	Description
A04	2020-02-06	Transition to II-VI template adjusted specification for R and PDL