



# High Power In-line Polarizer 1310nm, 1480nm or 1550nm

## Features

- High Extinction Ratio
- Low Insertion Loss
- High Return Loss

## Applications

- Communication Systems
- Test Instrumentations
- Fiber Sensors
- Research

## Specifications

Parameters	Unit	Values
Center Wavelength	nm	1310, 1480 or 1550
Operating Wavelength Range	nm	±50
Typ. Insertion Loss at 23°C	dB	0.3
Max. Insertion Loss at 23°C	dB	0.5
Min. Return loss	dB	50
Typ. Extinction ratio at 23°C (Input to Output)	dB	30
Min. Extinction ratio at 23°C (Input to Output)	dB	28
Min. Extinction Ratio at 23°C (Output to Input)	dB	23(Only for PM Fiber on Input Port)
Min.PDL(Only for SMF on all ports)@23°C	dB	25
Max. Optical Power (CW)	W	1, 3, 5,10 or Specify
Max. Peak Power for ns Pulse	kW	10
Max. Tensile Load	N	5
Fiber Type	-	PM Panda Fiber or SMF-28e
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85


\*Above specifications are for devices without connectors.

\*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower and ER will be 2dB lower,can only handle 1W (CW) power

\*The PM fiber and the connector key are aligned to the slow axis.

\*The material must be RoHS compliant.

## Package Dimensions

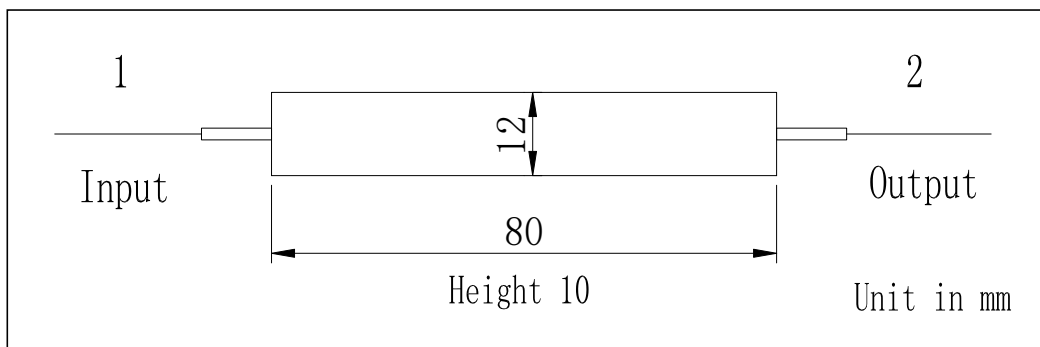

## Ordering information

**HILP-①①①①-②-③③-④④-⑤-⑥-⑦**

①①①①: Wavelength  
1550 - 1550nm  
S - Specify

②: Handling Power  
5 - 5W

③③: Connector Type on Port 1 & 2  
1A - FC/UPC  
2A - FC/APC  
3D - SC/UPC  
4D - SC/APC  
N - None  
S - Specify

④④: Fiber Jacket on Port 1 & 2  
B - 250um Bare Fiber  
C - 900um Red Loose Tube  
F - 900um White Loose Tube  
S - Specify

⑤: Fiber Type on Port 1 & 2  
3A - PM1550 Fiber  
8 - SMF-28e Fiber  
S - Specify

⑥: Fibre Length  
0.8 - 0.8m  
S - Specify

⑦: Package Type  
08 - 80×12×10