

Features

High Power Handling
 Low PDL
 Low Insertion Loss
 High Power Handling Capability

Applications

Fiber Amplifier
 Fiber Optic System
 Fiber Laser
 Low Cost

Specifications


Parameters	Unit	Values	
		Single Stage	Dual Stage
Center Wavelength		1310, 1480, 1550, 1590	
Operating Wavelength Range	nm	+/-20	
Max. Excess Loss	dB	1.0	1.1
Tap Ratio (Input to Tap)	%	1+/-0.2, 2+/-0.4, 5+/-1.0, 10+/-2.0	
Typ. Peak Isolation (Output to Input)	dB	40	58
Min. Isolation at 23°C	dB	28	48
Min. Extinction Ratio (only for B Type)	dB	20	
Min. Extinction Ratio (only for F Type)	dB	23	
Min. Return Loss (for all ports)	dB	50	
Max. Optical Power (CW)	W	1, 3, 5 or Specify	
Max. Peak Power for ns Pulse	kW	10	
Max. Tensile Load	N	5	
Fiber Type		PM 1550 Panda Fiber for Input and Output Ports, SMF-28e Fiber or Panda Fiber for Tap Port	
Operating Temperature	°C	-5 to +70	
Storage Temperature	°C	-40 to +85	

*Above specifications are for device without connector.

*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, ER will be 2dB lower and optical power is only 1000mW(CW).

*The PM fiber and the connector key are aligned to the slow axis and fast axis is blocked.

Package Dimensions

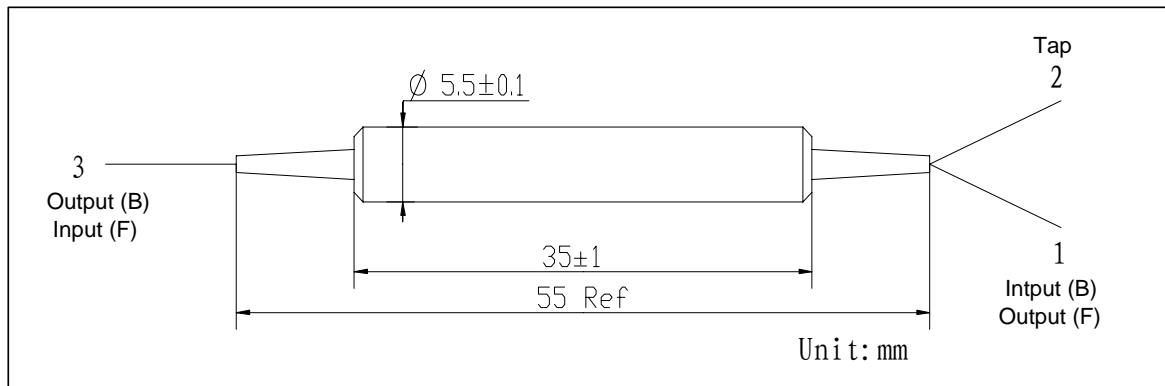

Ordering Information

HPMTAPI-①①-②-③③-④④-⑤-⑥⑥⑥-⑦⑦⑦-⑧-⑨

①①: Wavelength

31 - 1310nm

48 - 1480nm

55 - 1550nm

59 - 1590nm

SS - Specify

④④: Handling Power

01 - 1W

SS - Specify

⑤: Axis Alignment

F - Fast Axis Blocked

B - Both Axis Working

⑦⑦⑦: Fiber Jacket on Port 1, 2 & 3

B - 250um Bare Fiber

L - 900um Loose Tube

S - Specify

②: Stage

S - Single Stage

D - Dual Stage

⑥⑥⑥: Connector Type on Port 1, 2 & 3

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

⑧: Fiber Type on Tap

1 - SMF 28e Fiber

2 - PM Panda Fiber

S - Specify

③③: Tap Ratio

01 - 1%

02 - 2%

05 - 5%

10 - 10%

SS - Specify

⑨: Fiber Length

0.8 - 0.8 m

S - Specify