
**Optizone Polarization Insensitive Isolator**
**Features**

Optical Path Epoxy-free Design  
High Performance  
High Reliability  
Low Cost

**Applications**

EDFAs  
Raman Amplifiers  
DWDM Systems  
Fiber Lasers

**Specifications**

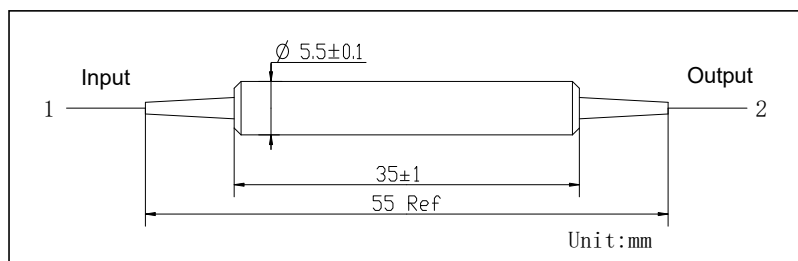
Parameters	Unit	Values			
		Single Stage		Dual Stage	
Grade	-	Grade P	Grade A	Grade P	Grade A
Center Wavelength	nm	1310, 1480 or 1550			
Operating Wavelength Range	nm	±20			
Typ. Peak Isolation	dB	42	40	58	55
Min. Isolation at 23°C	dB	28	26	48	45
Typ. Insertion Loss at 23°C	dB	0.35	0.4	0.4	0.6
Max. Insertion Loss at -5°C-70°C	dB	0.5	0.7	0.6	0.8
Min. Return Loss (Input /Output)	dB	57 / 55	57 / 55	57 / 55	57 / 55
Max.PDL at 23°C	dB	0.06	0.1	0.08	0.15
Max.PMD	ps	0.2 <sup>1</sup>	0.25 <sup>1</sup>	0.05	0.07
Max. Optical Power (CW)	mW	500			
Max. Tensile Load	N	5			
Fiber Type	-	SMF-28e Fiber			
Operating Temperature	°C	-5 to +70			
Storage Temperature	°C	-40 to +85			

<sup>1</sup>PMD<0.05ps is available. Please refer to below ordering information.

\*Above specifications are for device without connector.

\*For devices with connectors, IL will be 0.3dB higher and RL will be 5dB lower.

\*The material must be RoHS compliant.

**Package Dimensions****Ordering Information**

**PII-①①①①-②-③-④-⑤-⑥⑥-⑦⑦-⑧-⑨-⑩**

①①①①: Wavelength

1310 - 1310nm

1480 - 1480nm

1550 - 1550nm

S - Specify

②: Grade

P - Premium Grade

A - A Grade

③: Stage

S - Single Stage

D - Dual Stage

④: Handling Power

0.5 - 0.5W

⑤: PMD

1 - 0.05ps Max.

2 - Refer to above Spec

⑥⑥: Connector Type on Port 1 & 2

1A - FC/UPC

2A - FC/APC

3D - SC/UPC

4D - SC/APC

N - None

S - Specify

⑦⑦: Fiber Jacket on Port 1 & 2

B - 250um Bare Fiber

F - 900um White Loose Tube

T - 3mm Yellow Cable

S - Specify

⑧: Fiber Type

5 - SMF-28e Fiber

⑨: Fiber Length

1 - 1m

S - Specify

⑩: Package Type

01 -  $\varnothing 5.5 \times 35$