



Optical Fiber Mirror

Features

Low Insertion Loss
High Return Loss
High Reliability & Stability

Applications

Fiber Optics Lasers
Fiber Sensors
Coherent Detecting

Specifications


Parameters	Unit	Values
Center Wavelength	nm	1064
Operating Wavelength Range	nm	±30
Typ. Insertion Loss	dB	0.4
Max. Insertion Loss	dB	0.6
Max. PDL	dB	0.05
Max. Optical Power	mW	300
Max. Tensile Load	N	5
Fiber Type	--	HI 1060 Fiber
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

*Above specifications are for device without connector.

*For devices with connectors, IL will be 0.5dB higher.

*The material must be RoHS compliant.

Package Dimensions

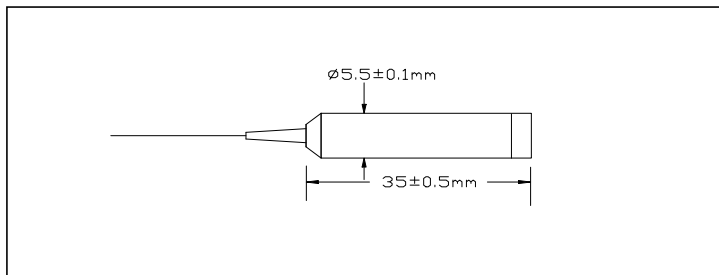

Ordering Information

OFM- ①①-②-③-④-⑤-⑥⑥-⑦⑦

①①: Wavelength
06 - 1064nm
SS - Specify

②: Handling Power
0.3 - 300mW
S - Specify

③: Connector Type
1A - FC/UPC
2A - FC/APC
3A - SC/UPC
4A - SC/APC
N - None

④: Fiber Jacket
B - 250um Bare Fiber
F - 900um Loose Tube(White)
G - 900um Loose Tube(Yellow)
E - 900um Loose Tube(Black)
S - Specify

⑤: Fiber Length
0.8 - 0.8 m
S - Specify

⑥⑥: Fiber Type
01 - HI-1060 Fiber

⑦⑦: Package Type
01 - $\varnothing 5.5 \times 35$