



1064nm High Power PM Collimated Beam Output Isolator

Features

High Isolation & High Power Handling
 High Extinction Ratio
 Low Insertion Loss & High Return Loss
 Excellent Environmental Stability and Reliability

Applications

Polarization Maintaining Fiber Amplifier
 Fiber Laser
 Instrumentation Applications
 Lab Research


Specifications

Parameters	Unit	Values
Center Wavelength (λ_c)	nm	1064 or Specify
Operating Wavelength Range	nm	± 10
Typ. Peak Isolation	dB	30~35
Min. Isolation at 23°C	dB	25
Typ. Transmission	-	93%
Min. Transmission	-	90%
Min. Return Loss	dB	50
Min. Extinction Ratio (only for F Type)	dB	20
Nominal Output Beam Diameter ($1/e^2$)@0~1m WD	mm	5+/-0.5, 6+/-0.5, 7+/-0.5 or Specify
Max. Optical Power (CW)	W	5, 10, 20 or Specify
Max. Peak Power	KW	10, 20 or Specify
Fiber Type	-	PM 980 Panda Fiber or PLMA Fiber
Max. Tensile Load	N	5
Operating Temperature	°C	-5 to +50
Storage Temperature	°C	-20 to +75

*For pulse applications, pls discuss with Optizone Technology.

*The dimensions of beam expanders are dependent on the required beam diameter,detailed informations pls contact Optizone or see the shipment data sheet.

Package Dimensions

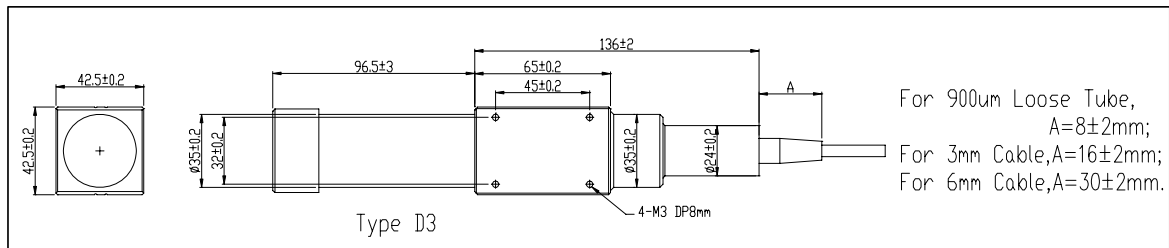

Ordering Information

HPMCI-①①-②②-③③-④④-⑤⑤-⑥⑥-⑦⑦

①①: Wavelength

06 - 1064nm

SS - Specify

②②: Package Type

D3 - Type D3

③③: Handling Power

05 - 5W

10 - 10W

20 - 20W

SS - Specify

④④: Axis Alignment

F - Fast Axis Blocked

⑤⑤: Output Beam Diam

50 - 5mm

60 - 6mm

70 - 7mm

SS - Specify

⑥⑥: Fiber Jacket on Port 1 & 2

L - 900um Loose Tube

C - 3mm Loose Cable

A - 3mm Armoured Cable

B - 6mm Armoured Cable

S - Specify

⑦⑦: Fiber Length

0.8 - 0.8m

S - Specify