



# Optizone 1064nm Polarization Beam Combiner/Splitter

## Features

High Extinction Ratio  
Low Insertion Loss  
High Return Loss

## Applications

Fiber Lasers  
Raman Amplifier  
Sensors

## Specifications


Parameter	Unit	Values	
		Grade P	Grade A
Grade		Grade P	Grade A
Center Wavelength	nm	1064	
Operating Wavelength Range	nm	±20	
Typ. Insertion Loss	dB	0.6	0.7
Max. Insertion Loss	dB	0.8	0.9
Min. Return Loss	dB	50	
Min. Extinction Ratio (for Splitter only )	dB	22	20
Min.PDL 23°C (only for HI1060 Fiber on all ports)	dB	20	
Min. Directivity	dB	50	
Max. Optical Power (CW)	mW	300	
Max. Tensile Load	N	5	
Fiber Type		PM 980 Panda Fiber on Port 1 and 2	
Operating Temperature	°C	-5 to + 70	
Storage Temperature	°C	-40 to +85	

\*Above specifications are for device without connector.

\*For devices with connectors, IL will be 0.5dB higher, RL will be 5dB lower and ER will be 2dB lower.

\*The PM fiber and the connector key are aligned to the slow axis.

## Package Dimensions

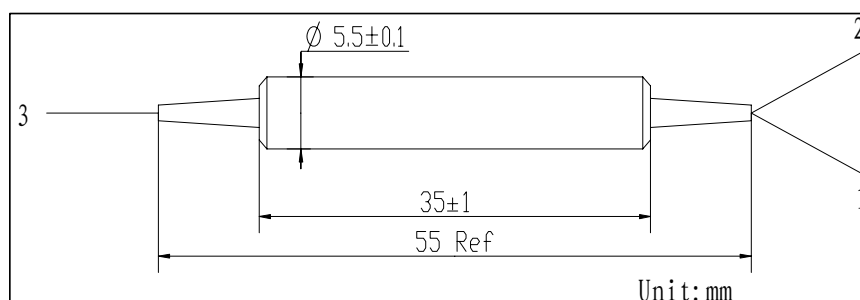

## Ordering Information

**PBC**-①①-②-③-④④④-⑤⑤⑤-⑥-⑦

**PBS**-①①-②-③-④④④-⑤⑤⑤-⑥-⑦

①①: Wavelength      ④④④: Connector Type on Port 1, 2 & 3

06 - 1064nm

SS - Specify

②: Grade

P - Premium

A - A Grade

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

⑥: Fiber Type on Port 3

1 - HI 1060 Fiber

2 - PM Panda Fiber, Slow Axis align 45°to Port 1

3 - PM Panda Fiber, Slow Axis align to Port 1

4 - All ports are HI1060

S - Specify

③: Port

1 - 1x2

⑤⑤⑤: Fiber Jacket on Port 1, 2 & 3

B - 250um Bare Fiber

L - 900um Loose Tube

S - Specify

⑦: Fiber Length

0.8 - 0.8m

S - Specify