

# SAX20r, SAO20r and SAC20r

## QLight® Swept Source Amplifiers

### Features and Applications


- ◆ Wide bandwidth operation
- ◆ X-Band: 40 nm
- ◆ O-Band: 100 nm
- ◆ C-Band: 150 nm
- ◆ Low polarization dependence
- ◆ 14-Pin MSA package
- ◆ Medical image
- ◆ ASE source
- ◆ Fiber optic sensing
- ◆ Gain medium for swept sources

### Description

The QLight® SAX20r, SAO20r, SAC20r are semiconductor optical amplifiers (SOA) suitable for use as gain elements in swept sources and as ASE sources. They are used in a broad spectrum of applications including fiber optic sensing, medical imaging and test & measurement. They are based on the Aeon proprietary QLight technology platform for the manufacturing of advanced discrete photonic devices.

The amplifiers are available in a MSA compliant, 14-pin butterfly package, based on the Aeon standard packaging platform. The use of a laser-welded, hermetic, organics-free package ensures highly reliable operation. The package incorporates both a thermistor and a thermo-electric cooler to provide stable operation of the SOA over the full operating temperature range.

Aeon offers a broad range of SOAs supporting wavelengths from 1000 nm to 1600 nm, with gain options from 5 to 30 dB and we can optimize parameters to meet your specific application needs. .

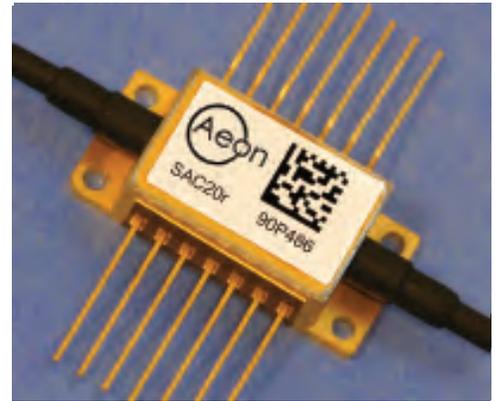

# SPECIFICATIONS

## Absolute Maximum Ratings\*

Parameter	Symbol	Min	Typ	Max	Unit	Note
Operating Temperature	$T_{case}$	0		70	°C	Case Temperature
Storage Temperature	$T_{store}$	-40		85	°C	
Operating Bias Current	$I_f$			450	mA	
Optical Amplifier Reverse Bias	$V_{rev}$			2	V	
Thermistor Current	$I_{therm}$			5	mA	
TEC Current	$I_{TEC}$			1.8	A	
TEC Voltage	$V_{TEC}$			3.4	V	

\*Stresses in excess of the Absolute Maximum Ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational section of the datasheet. Exposure to Absolute Maximum Ratings for extended periods can adversely affect the device reliability.


## Operating Specifications\*

Parameter	Symbol	SAX20r			SAO20r			SAC20r			Unit	Note
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
Operating Wavelength	$\lambda$	1040		1080	1250		1350	1450		1600	nm	
Peak Gain	$G_{pk}$	19			19			19			dB	
Gain Ripple	GR			2				2			dB	
Polarization Dependent Gain	PDG		-					2			dB	Gain peak $\pm$ 10 nm
Saturation Output Power	$P_{SAT}$	7			7			7			dBm	3.0 dB gain compression
Forward Voltage	$V_f$		2			2			2		V	
Operating Bias Current	$I_{op}$		300			300			300		mA	
Thermistor Resistance	$R_{therm}$		10			10			10		k $\Omega$	At 25°C
Total Power Consumption	P			4			4			4	W	$T_{case} = 70^\circ\text{C}$ , By design

\*Specifications are subject to change without notice.

Pin	Function	Pin	Function
1	TEC (+)	14	TEC (-)
2	Thermistor	13	NC
3	NC	12	NC
4	NC	11	Chip (-)
5	Thermistor	10	Chip (+)
6	NC	9	NC
7	NC	8	NC

\*Note: Pin #1 is marked by a bevel (notch) at the base of the housing

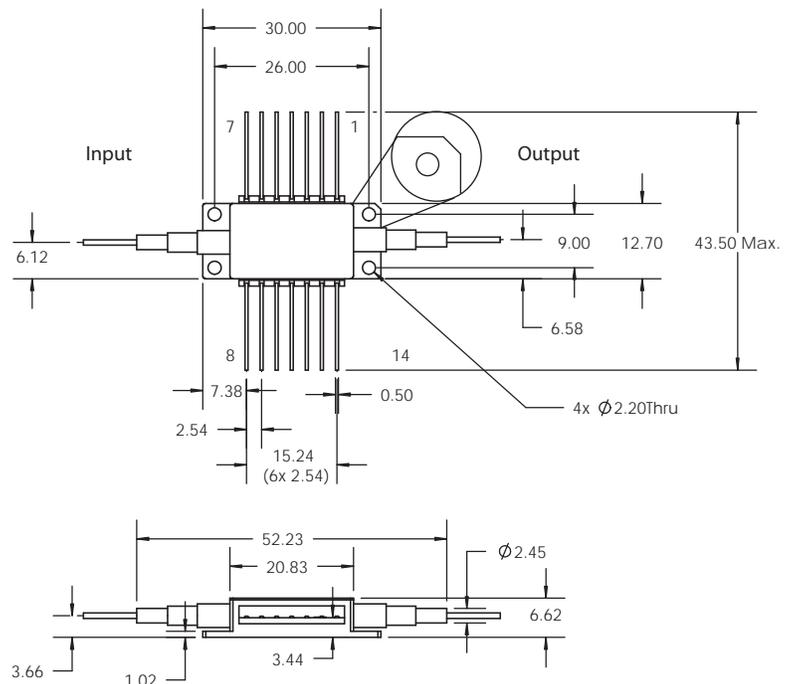

The information contained herein is for informational purposes only. Technical claims listed depend on various technical assumptions. Your experience with these products may differ if you operate the products in an environment which is different from the technical assumptions. Aeon reserves the right to modify these specifications without any prior notice. Aeon makes no warranties, expressed or implied, on the information contained in this document.