

Spec Review No.:SR2308032A

Date:MQr ,17,2023

Customer:

Customer P/N:

Description: MMPC-7X1 Multi-Mode Pump Combiner

Optizone P/N: MMPC-LC-7X1-78-161-2-P4


### Specifications

Parameters	Unit	Values
Pump Wavelength	nm	790-1100
Pump Fibers	-	PTIU220/242/325FA22
Output Fiber	-	YOFC SI 800/880-22/1050(DC) NA0.22
Handling Power (Pump Ports)	W	1500
Min. Pump Efficiency	%	97
Operating Temperature	°C	-5 to 75
Storage Temperature	°C	-40 to 85
Package	mm	160(L) x30(W) x12(H)

\*Above specifications are for device without connector.

\*The material must be RoHS compliant.

### Package Dimensions

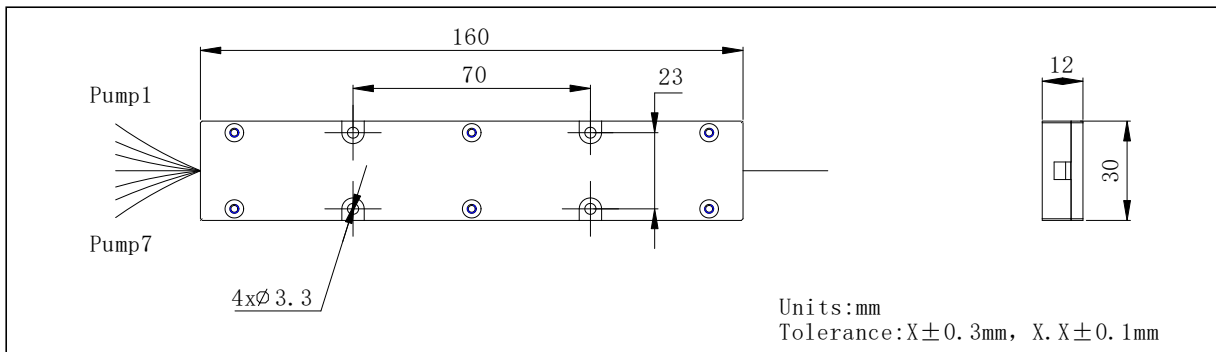

### Ordering Information

#### MMPC-LC-7X1-①①-②②②-③-④

①①: Pump Fiber Type

78 - PTIU220/242/325FA22

SS - Specify

③: Fiber Length

2 - 2m

S - Specify

②②②: Output Fiber Type

161 - YOFC SI 800/880-22/1050(DC) NA0.22

SSS - Specify

④: Package Type

P4 - 150 x30 x12

SS - Specify