



# 4-Head Solid-State UV Spot Light

## Product Description

The 4-Head Solid-State UV Light uses high power UV LEDs as light sources for curing UV adhesives. Major advantages offered compared to traditional lamp based systems include: long life, low power consumption, and compact size. Our superior optical design achieves high light coupling efficiency exceeding 85% and uniform light spot intensity.

Each head can be switched on/off either individually by front panel controls or simultaneously by an optional foot switch. The cure time and UV output power can be set independently. Each LED head features an integrated cooling fan.



## Applications

**Features** 

Compact

High Power

Up to 18 hrs. continuous

operation

Low Operating CostLong Operation Life

- UV Adhesive Curing
- UV Irradiation Experiments

# Rolls

#### **Performance Specifications**

| Parameter        | Description            | Unit              |  |
|------------------|------------------------|-------------------|--|
| Wavelength       | 365±5, 385±5, 405, 440 | nm                |  |
| UV irradiance    | 2.0 ~ 3.2 *            | W/cm <sup>2</sup> |  |
| Cure time        | 1s to 18 hr            | •                 |  |
| UV spot size     | Ф4                     | mm                |  |
| Working distance | 20                     | mm                |  |
| Cooling method   | forced air, fan        | *                 |  |
| Operation life   | 30,000                 | hours             |  |

<sup>\*</sup> Average intensity over the spot size Φ4mm at working distance.



## 4-Head Solid-State UV Spot Light


(Model SUV-03)

| Recommended UV Epoxy |                    |  |  |
|----------------------|--------------------|--|--|
| Supplier             | Part Number        |  |  |
| Loctite              | 3972               |  |  |
| Epoxy Technology     | OG603, OG198       |  |  |
| Fiber Optic Center   | AB9047, DSM956-105 |  |  |

| Electrical Specifications |                         |
|---------------------------|-------------------------|
| Parameter                 | Description             |
| AC adaptor input          | 100 ~ 240 VAC, 50/60 Hz |
| Controller supply input   | 12 V DC, 5A             |

### **Mechanical Footprint Dimensions**

| Component   | Dimensions     | Unit |
|-------------|----------------|------|
| UV LED head | Ф22 х 110      | mm   |
| Controller  | 120 x 85 x 200 | mm   |

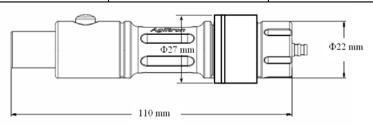

Standard hardwired cable is 1.5 m long.

\*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

#### **Ordering Information**

| SUVA- |                             |   |   |  |   |                                     |                             |                   |
|-------|-----------------------------|---|---|--|---|-------------------------------------|-----------------------------|-------------------|
|       | Туре                        | Head 1  | Head 2  | Head 3   | Head 4  | Head Holder                         | Cooling Fan                 | Foot Switch       |
|       | 4-Head = 03<br>Special = 00 | Non=0<br>365 nm = 1<br>385 nm = 2<br>405 nm = 3<br>440 nm = 4 | Non=0<br>365 nm = 1<br>385 nm = 2<br>405 nm = 3<br>440 nm = 4 | Non=0<br>365 nm = 1<br>385 nm = 2<br>405 nm = 3<br>440 nm = 40 | Non=0<br>365 nm = 1<br>385 nm = 2<br>405 nm = 3<br>440 nm = 4 | Non = 0<br>1=1<br>2=2<br>3=3<br>4=4 | Standard = 1<br>Special = 0 | Yes = 1<br>No = 0 |

